


ecogise Mains Pressure Valve Diagram

Plumbing Installation

Plumbing the potable water

All plumbing installations of ecogise solar water heating systems are to be carried out as per the current NZ plumbing standards and regulations. This includes all pipe work, valves, restraints, potable water, connections, penetrations, consents etc.

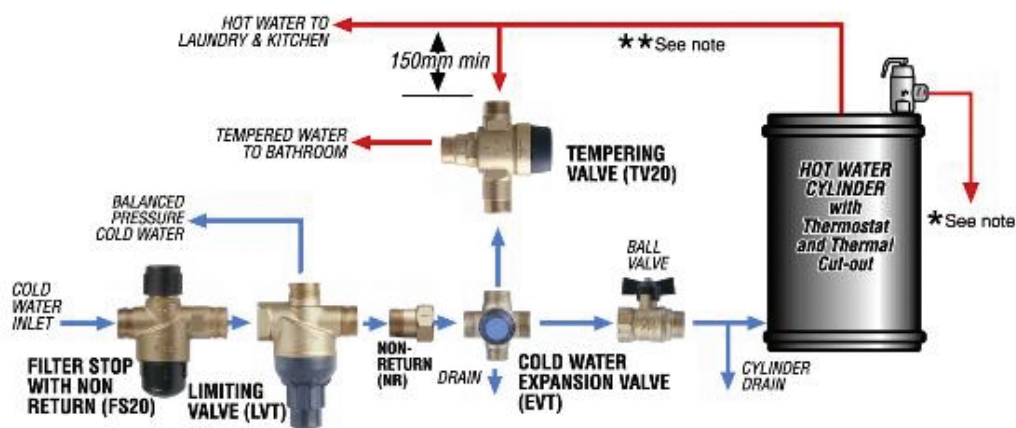

Notes:

* If the drain exceeds a factor of 12 as a combination of length in meters and number of bends (e.g. 7 metres & 5 bends) we recommend the installation of an SVB vacuum break.

** 1.0m minimum copper pipe length from cylinder to Tempering Valve